

- Rotatable outreach

- Rear or base mounting options

- Height Range available: 5.5- 6.6m
- 1, 2, 3 and 4 VLS configurations
- Bi Directional rotation (Left and Right)

Rotodrive

- Outreach will not rotate without being driven by the mechanism. Sealed for nil maintenance required in road environment.
- Additional brake for redundancy fitted.

Requirements

QTY Required _____

Post Construction



VLS Height from Carriageway 5.5m 8.5m

Your Contact Details: _____


Post Material

- Steel
- Stainless Steel

Coating

- Galvanised
- Raw - No Coating
- Powder Coated
- Powder Coated

Luminaire Configuration

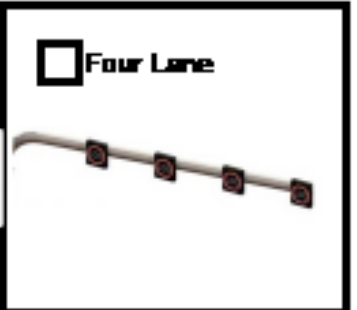

Options



Shoulder Width (2m max for 3 lanes) _____ m

Distance behind barrier (max 1m) _____ m

Base Mounted Cabinet Bracket



Base Mounting



Rear Mounting



Return form to: sales@rotopost.com.au or fax to: +61 7 3256 9960